



GAODETEC

郑州高德机械设备有限公司

Gaode Equipment Co., Ltd.

地址 ADD: 郑州市金水区丰庆路 4 号院 14 号楼 9 号

邮编 P.C.:450053

No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District, Zhengzhou, Henan

China网站 (Web) :www.gaodetec.com

E-Mail: info@gaodetec.com

电话 TEL.:+86-371-55951660

Program Controlled Automatic Chamber Filter Press

Introduce:

Our program controlled automatic chamber filter press use micro computer processor, PLC and touch screen to control every part's action, such as: cylinder, plate shifter, cloth washing, etc.

High efficiency filter press expended the length of cylinder and can discharged several cakes every time. The advantages are stable performance, high efficiency and lower running cost, reduce labor resources.



Features:

- Labor saving
- Big pressing force(17-20MPa) can avoid leakage effectively.

Email: info@gaodetec.com



GAODETEC

郑州高德机械设备有限公司

Gaode Equipment Co., Ltd.

地址 ADD: 郑州市金水区丰庆路 4 号院 14 号楼 9 号 邮编 P.C.:450053

No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District, Zhengzhou, Henan China

网站 (Web) :www.gaodetec.com


E-Mail: info@gaodetec.com

电话 TEL.:+86-371-55951660

- Auto closing and auto opening
- Work temperature up to 95 deg C
- Low operation cost,long life,easy to maintain and high efficiency

Application:

The program controlled automatic chamber filter press is used in chemical, petroleum, pharmaceutical, light industry, food, mineral processing, water treatment, electroplating, metallurgy, dyes, textile, industries etc.

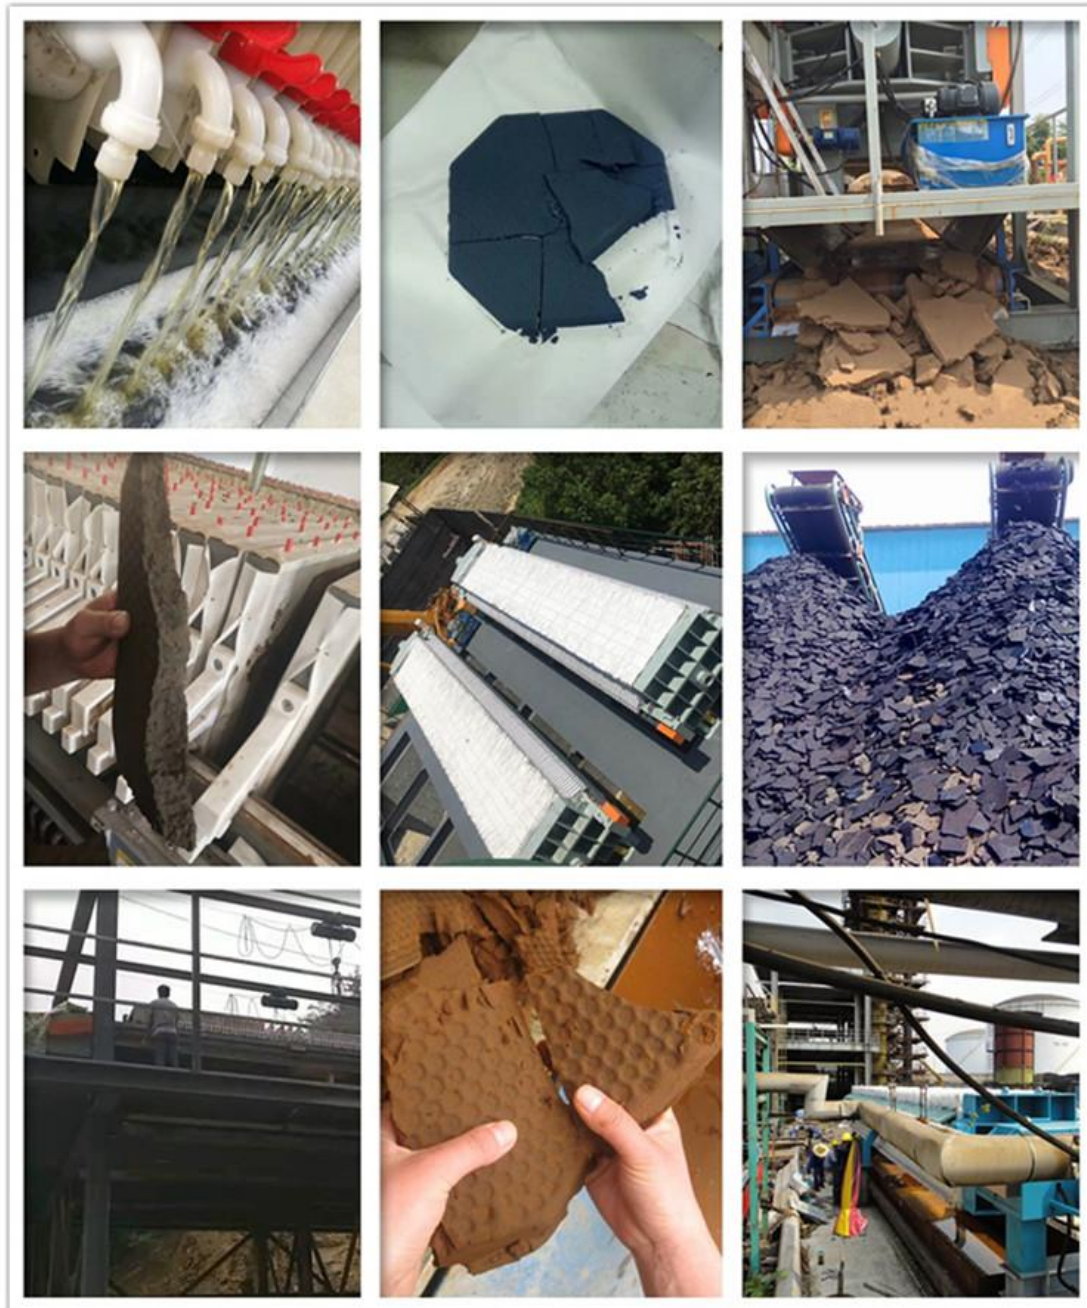

Email: info@gaodetec.com



GAODETEC

郑州高德机械设备有限公司

Gaode Equipment Co., Ltd.

地址 ADD: 郑州市金水区丰庆路 4 号院 14 号楼 9 号 邮编 P.C.:450053


No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District, Zhengzhou, Henan China

网站 (Web) :www.gaodetec.com

E-Mail: info@gaodetec.com

电话 TEL.:+86-371-55951660

Details:

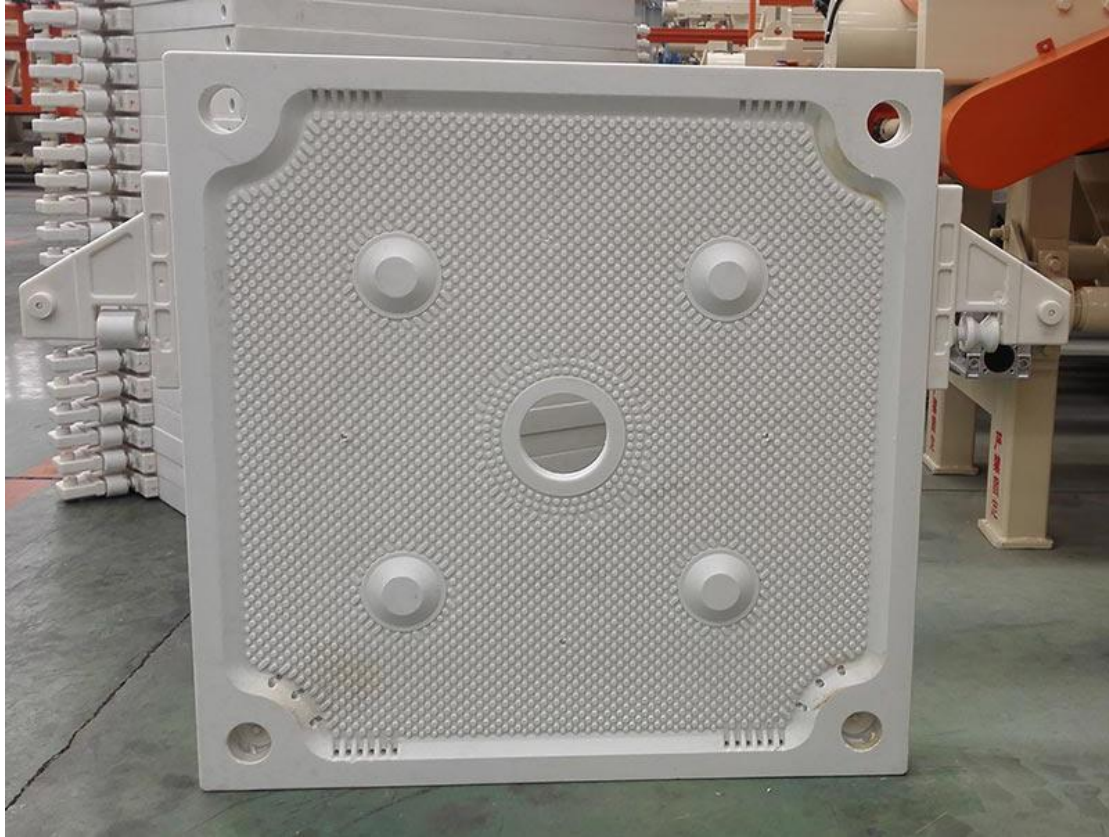

Email: info@gaodetec.com



GAODETEC

郑州高德机械设备有限公司

Gaode Equipment Co., Ltd.

地址 ADD: 郑州市金水区丰庆路 4 号院 14 号楼 9 号 邮编 P.C.:450053

No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District, Zhengzhou, Henan China

网站 (Web) :www.gaodetec.com

E-Mail: info@gaodetec.com

电话 TEL.:+86-371-55951660

Our factory:



Email: info@gaodetec.com

Technical parameters:

规格型号 Model	过滤面积(m ²) Filter area	滤板尺寸(mm) Plate size	滤饼厚度(mm) Cake thickness	滤室容积(L) Filter chamber volume	滤板数量(pcs) Plate NO.	过滤压力(Mpa) Filtration pressure	电机功率(Kw) Motor Power	整机质量(Kg) Weight	外形尺寸长×宽×高(mm) Dimensions L×W×H(mm)	地基尺寸(mm) Foundation Size(mm)			
										L	B	D	H
X [▲] Z30/870-30U [®]	30	870×870 可选(Or) 800*800	30	460	23	≥0.6	2.2	2680	3180×1400×1230	2360	700	1380	785
X [▲] Z40/870-30U [®]	40			595	30			3050	3570×1400×1230	2750			
X [▲] Z50/870-30U [®]	50			748	38			3456	4110×1400×1230	3290			
X [▲] Z60/870-30U [®]	60			902	46			4003	4550×1400×1230	3730			
X [▲] Z70/870-30U [®]	70			1056	54			4584	4990×1400×1230	4170			
X [▲] Z80/870-30U [®]	80			1210	62			5082	5430×1400×1230	4610			
X [▲] Z50/1000-30U [®]	50	1000×1000		736	28	≥0.6	4.0	4128	4040×1500×1360	3120	780	1480	870
X [▲] Z60/1000-30U [®]	60			889	34			4636	4460×1500×1360	3480			
X [▲] Z70/1000-30U [®]	70			1041	40			5143	4760×1500×1360	3840			
X [▲] Z80/1000-30U [®]	80			1193	46			5651	5120×1500×1360	4200			
X [▲] Z100/1000-30U [®]	100			1475	57			6628	5780×1500×1360	4860			
X [▲] Z120/1000-30U [®]	120			1777	69			7644	6500×1500×1360	5580			

规格型号 Model	过滤面积(m ²) Filter area	滤板尺寸(mm) Plate size	滤饼厚度(mm) Cake thickness	滤室容积(L) Filter chamber volume	滤板数量(pcs) Plate NO.	过滤压力(Mpa) Filtration pressure	电机功率(Kw) Motor Power	整机质量(Kg) Weight	外形尺寸长×宽×高(mm) Dimensions L×W×H(mm)	地基尺寸(mm) Foundation Size(mm)			
										L	B	D	H
X [▲] Z100/1250-30U [®]	100	1250×1250	30	1468	36	≥0.6	4.0	8307	5020×1800×1600	3970	850	1740	995
X [▲] Z120/1250-30U [®]	120			1746	43			9308	5470×1800×1600	4430			
X [▲] Z140/1250-30U [®]	140			2063	51			10455	5990×1800×1600	4950			
X [▲] Z160/1250-30U [®]	160			2341	58			11492	6450×1800×1600	5400			
X [▲] Z180/1250-30U [®]	180			2619	65			12494	6905×1800×1600	5860			
X [▲] Z200/1250-30U [®]	200			2896	72			13504	7360×1800×1600	6310			
X [▲] Z220/1250-30U [®]	220			3214	80			14652	7880×1800×1600	6830			
X [▲] Z250/1250-30U [®]	250			3650	91			16227	8600×1800×1600	7550			
X [▲] Z200/1500-35U [®]	200	1500×1500	35	2998	49	≥0.6	7.5	20030	6400×2200×1900	5250	1170	1990	1070
X [▲] Z250/1500-35U [®]	250			3594	61			22978	7225×2200×1900	6090			
X [▲] Z300/1500-35U [®]	300			4347	74			26026	8130×2200×1900	6990			
X [▲] Z350/1500-35U [®]	350			5043	86			29220	8950×2200×1900	7840			
X [▲] Z400/1500-35U [®]	400			5796	99			32574	9880×2200×1900	8750			
X [▲] Z450/1500-35U [®]	450			6492	111			35586	10690×2200×1900	9590			
X [▲] Z500/1500-35U [®]	500			7187	123			38606	11560×2200×1900	10430			
X [▲] Z600/2000-40U [®]	600			2000×2000	40			8926	85	≥0.6			
X [▲] Z700/2000-40U [®]	700	10380	99			53000	12200×3000×2500	10300					
X [▲] Z800/2000-40U [®]	800	11210	107			57000	13350×3000×2500	11450					
X [▲] Z900/2000-40U [®]	900	13290	127			61000	14500×3000×2500	12600					
X [▲] Z1000/2000-40U [®]	1000	14740	141			65000	15600×3000×2500	15600					