



GAODETEC

## GGP300/350/85 Grout Station/Plant

### Description

The GGP300/350/85 grout station is combination of mixer, agitator and hydraulic plunger grout pump in one plant. Mainly suitable for mixing and pumping water, cement, sand, bentonite, filler, clay power, silicates and other additives.

### Feature

1. Compact size, It is combination of mixer, agitator and hydraulic plunger grout pump in one base frame;
2. Have low pressure and high pressure, stepless speed regulation;
3. Yuken relief valve and directional valve for hydraulic system of grout pump;
4. Butterfly valve of mixer and agitator;
5. Oil temperature gauge can automatically control cooler fan working in normal temperature range, if temperature is too high, the machine will stop work automatically;
6. Operation and maintenance are simple;
7. With ISO, CE certificate.



**Technical data**

Type	GGP300/350/85 Grout Station	
Voltage	3 phase, 380V, 50HZ	
Dimensions	2100x2030x1700mm	
Weight	1250kg	
<b>Mixer</b>		
Capacity	300L	
Power	9kw	
Rated Rev.	1500rpm	
<b>Agitator</b>		
Volume	350L	
Power	1.5kw	
Rated Rev.	36rpm	
<b>Pump</b>		
Type	Hydraulic Plunger pump	
Pressure and Output	24 Bar (low pressure) 85L/min	
	50 Bar (high pressure) 55L/min	


**Pictures in different angles:**





### Detailed parts



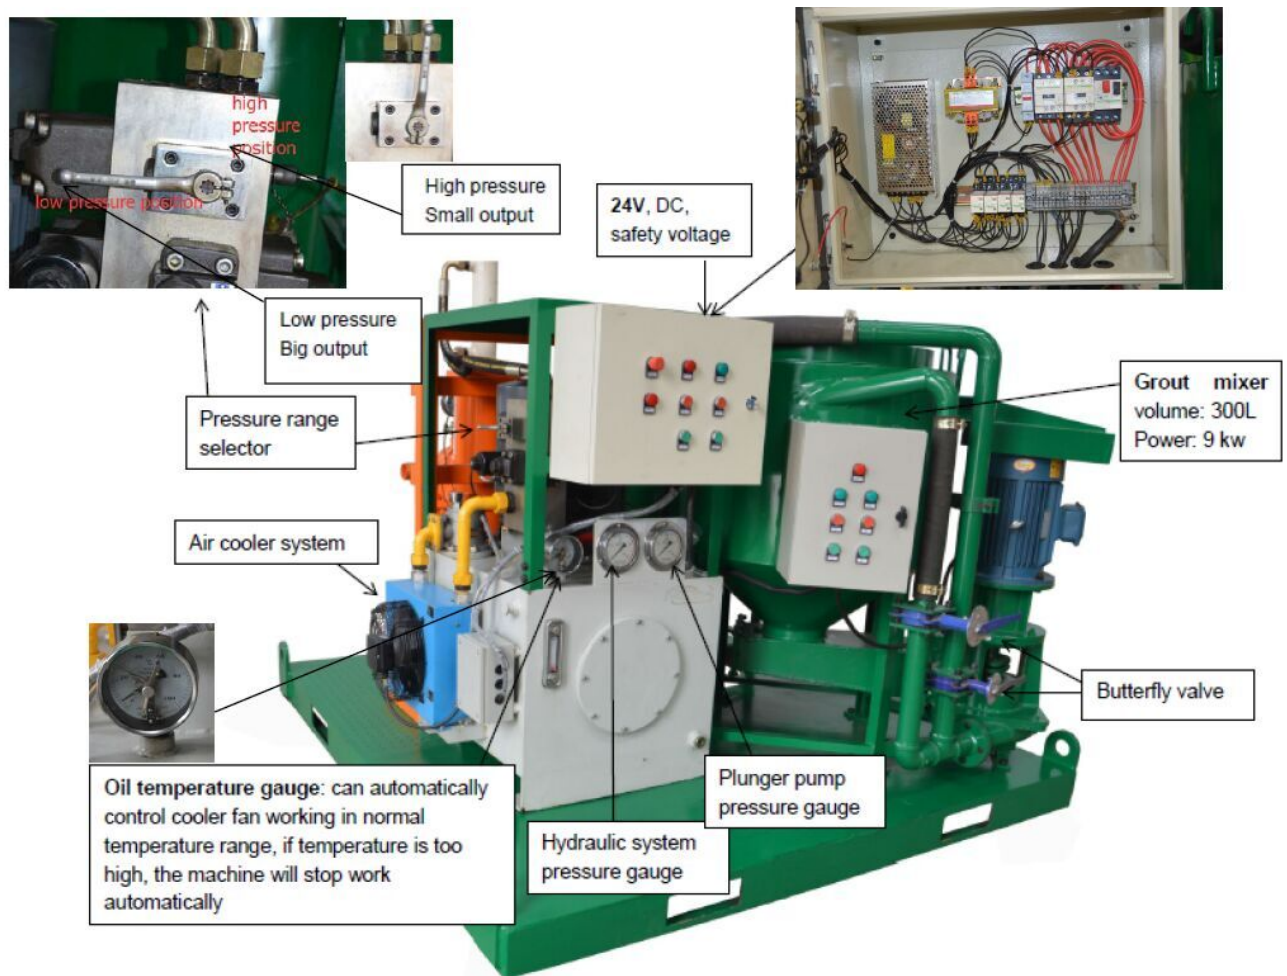

郑州高德机械设备有限公司

Gaode Equipment Co.,Ltd.

No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District,  
Zhengzhou,China

Phone: +86-371-55951660/55951210

Mobile phone:+86-13939067523

email: [info@gaodetec.com](mailto:info@gaodetec.com)

Web: [www.gaodetec.com](http://www.gaodetec.com)

[www.grout-pumps.com](http://www.grout-pumps.com)