



GDM60/40 Medium-Pressure Dual- slurry Grouting Pump

Our grouting pumps provide widely range grouting pressure selection as well as the dependability and durability required on your job site. The grouting pumps are ideal for grouting-process in underground and civil applications.

Features:

1. Dual-slurry grouting pump
2. Single piston with double-acting
3. Gear reducer
4. Ball valve
5. Compact size
6. Iron-casting pump house

Technical data:


Specification:	
Rated Output	60L/min
Rated Pressure	4MPa(40bar/580psi)
Cylinder Dia.	75mm
Piston Stroke	85mm
Stroke/Minute	85/min
Inlet diameter	38mm
Outlet diameter	32mm
Power unit	5.5KW(Electric) 10hp(Diesel)
Transmission	V-belt+gearbox
Chassis	Skid
Weight	210kg
Overall Dimensions	1280x485x645mm
Note: Single or Double Passageway are optional; Chassis: Skid or Tyre	

Certificate:

CE AND ISO9001-2008



Pump Picture:

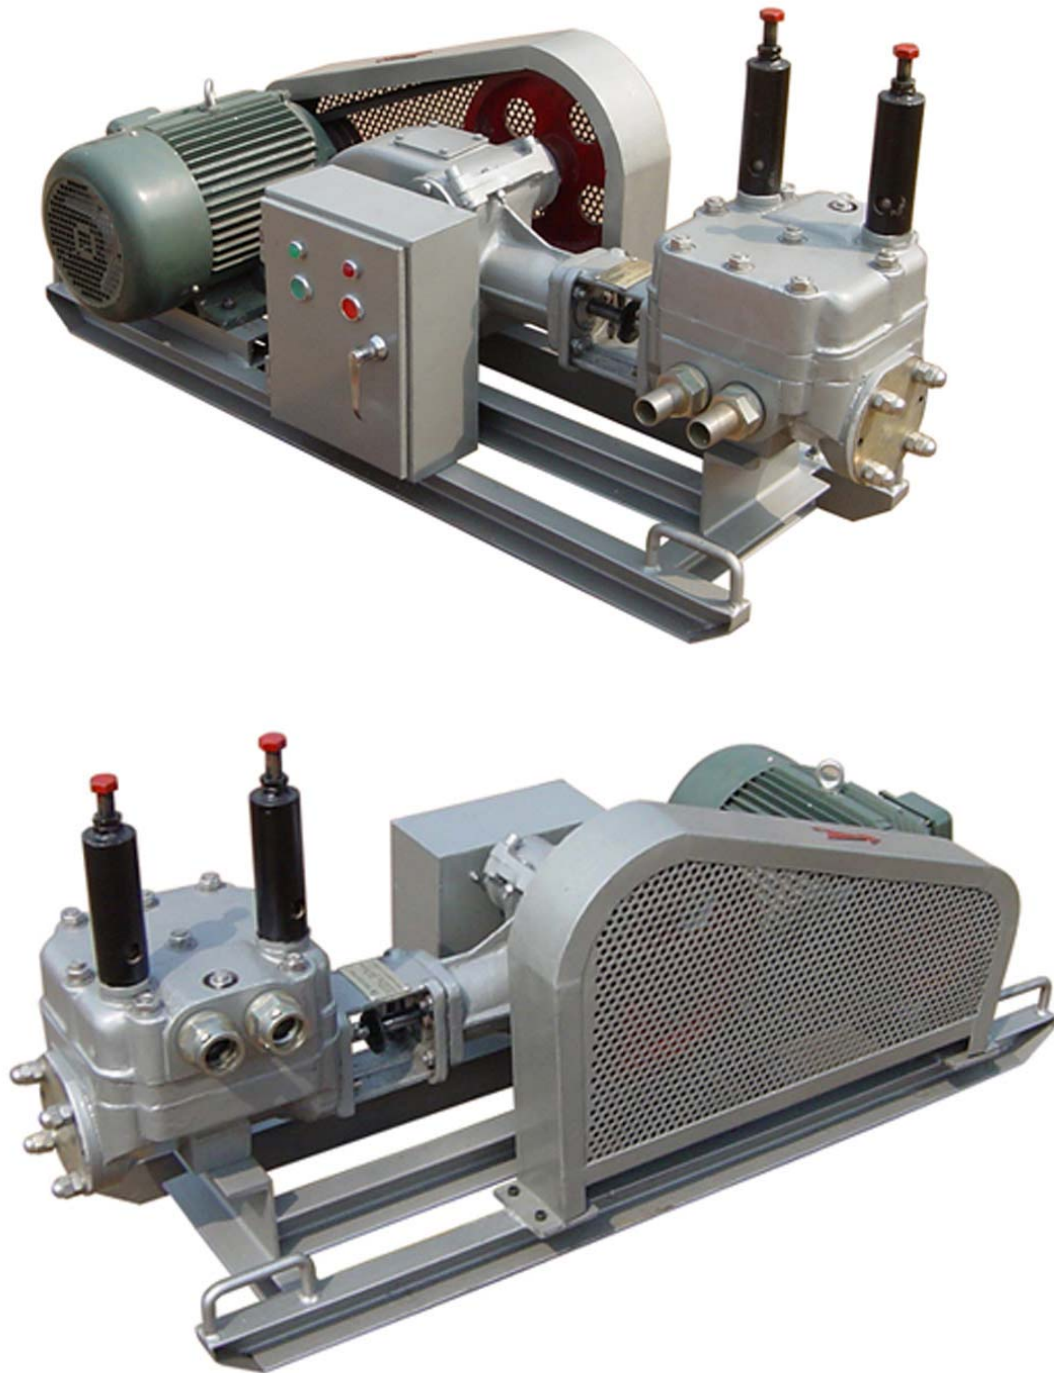

Gaode grout pump