

## GGP400/700/80DPL-E TBM grout plant



### ◆ **Product Description:**

GGP400/700/80DPL-E TBM grout plant is a combination of mixer, agitator and grout pump in one base frame. It is mainly used to be made bentonite slurry, cement slurry, etc., in the application highway, railway, hydropower, construction, mining and other ground and underground construction.


High speed vortex mixer ensures mix quickly and evenly. Water, cement or bentonite is quickly mixed into homogeneous slurry. Then the mixed slurry was delivered to the agitator. Grout pump injects from the mixing drum (storage tank). This ensures a continuous mixing and grouting operations. What's more, the double-plunger pump together with the pressure-holding system is used, so that the pump automatically stops and maintains the very little pressure impulse (1-4bar with 50bar grouting pressure) to ensure that the grouting hole is completely filled. The grouting plant is hydraulic drive with electric motor. Grouting pressure and displacement is adjustable. Compact size and it is easy to operate. It also takes up a small space.

### ◆ **Product Feature**

1. High-speed colloidal grout mixer
2. With the liquid level of the mixer tank
3. Double plunger pump
4. Vertical type pump with compact size
5. Hydraulic drive (safely releasing pressure when pumping block)
6. Hydraulic system with high temperature warning and protection system
7. Pressure holding system
8. Low flow pressure surge system
9. Air cooler and water cooler (suitable for working in tropical and sub-hot areas)
10. Up to 5mm particle size

## GGP400/700/80DPL-E Grout/Inject Station

### ◆ Model Definition

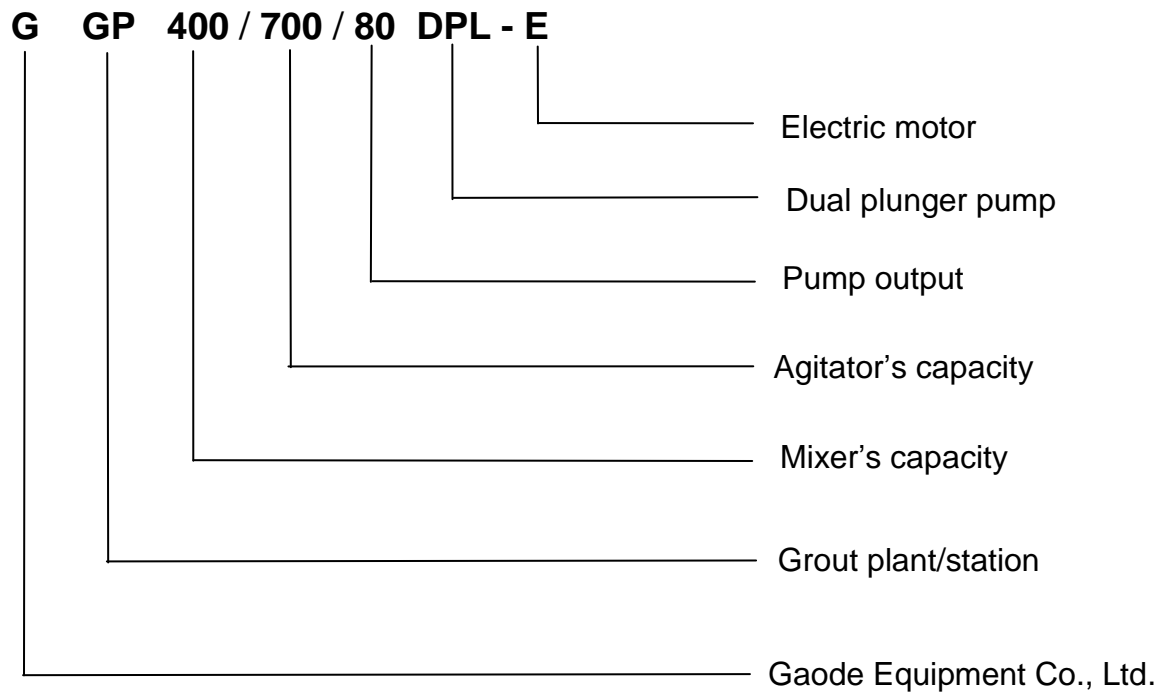


## GGP400/700/80DPL-E Grout/Inject Station

### ◆ Product Specification

Description	Data
Grout Station model	GGP400/700/80DPL-E
Dimensions	2350*2100*1830mm
Weight	1530kg
<b>Mixer</b>	
Capacity	400L
Recycling discharge	1100L/min
Suitable water/cement ratio	≥0.5:1
Motor power	7.5Kw
Rated Rev.	1450rpm
<b>Agitator</b>	
Capacity	700L
Motor model	1.5Kw
Rated Rev.	36rpm
<b>Pump(vertical compact hydraulic grout pump)</b>	
Output/pressure	Low pressure: 0-80L/min, 0-25bar High pressure: 0-58L/min, 0-40bar
Power	11Kw
We could also customize TBM grout plant according to your demands.	

## GGP400/700/80DPL-E Grout/Inject Station


### ◆ Detail Part

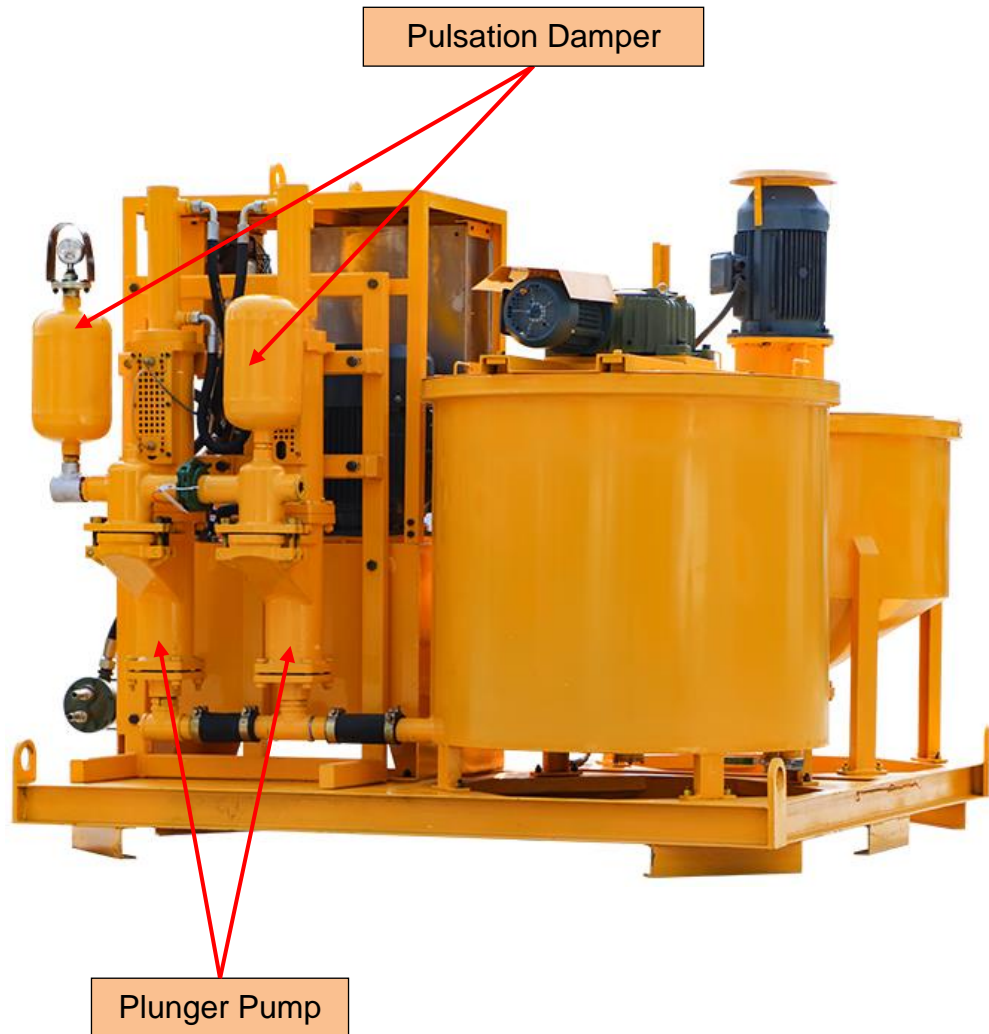

## GGP400/700/80DPL-E Grout/Inject Station



Level Gauge

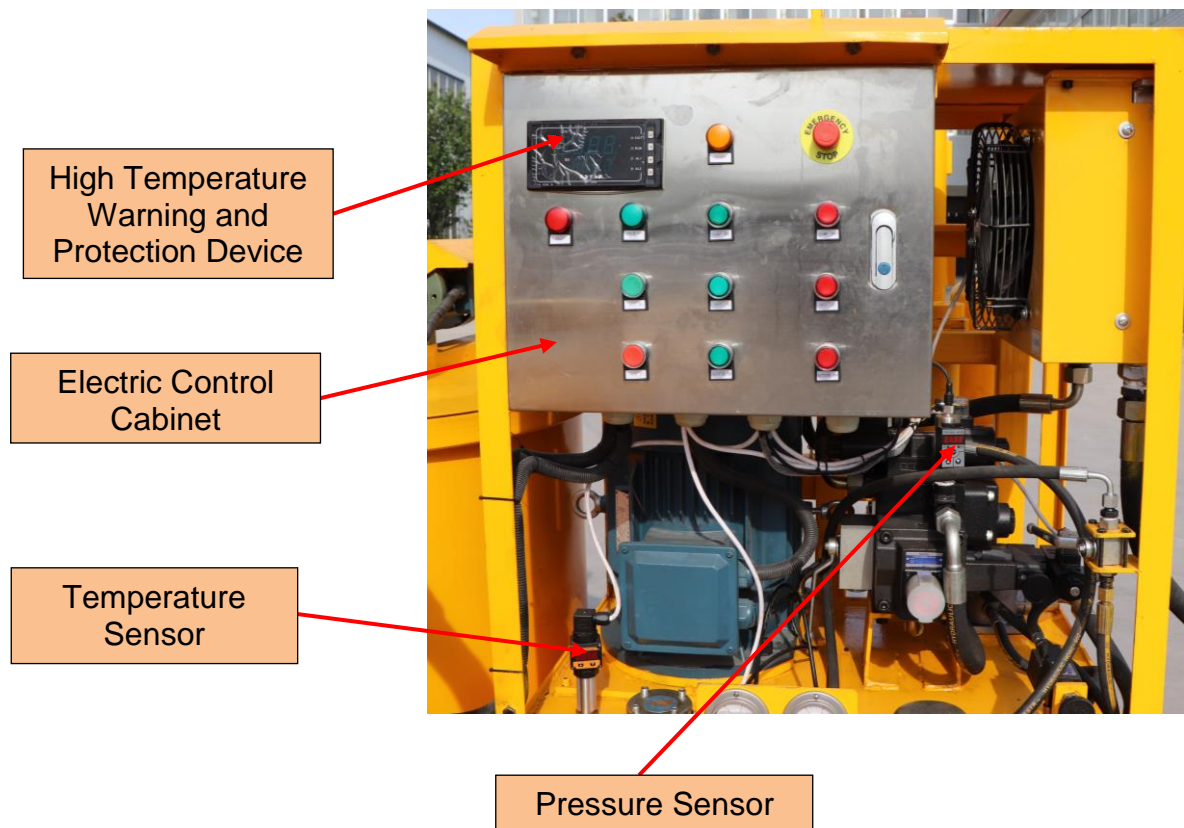

High Temperature  
Warning and  
Protection Device


Electric Control  
Cabinet

Temperature  
Sensor

Pressure Sensor



## GGP400/700/80DPL-E Grout/Inject Station

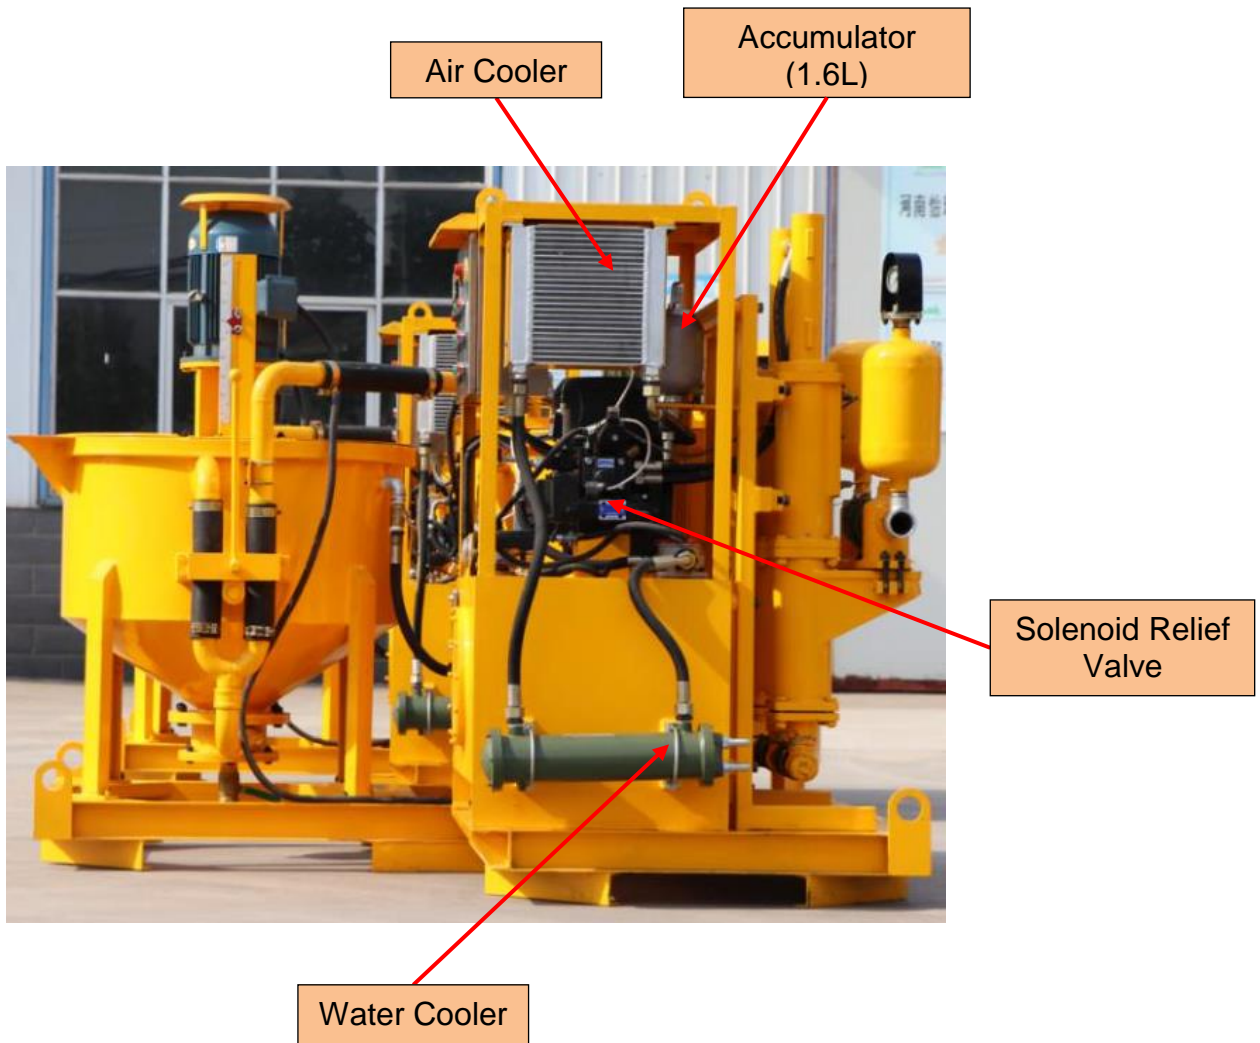


## GGP400/700/80DPL-E Grout/Inject Station

### ◆ Other Angle Pictures





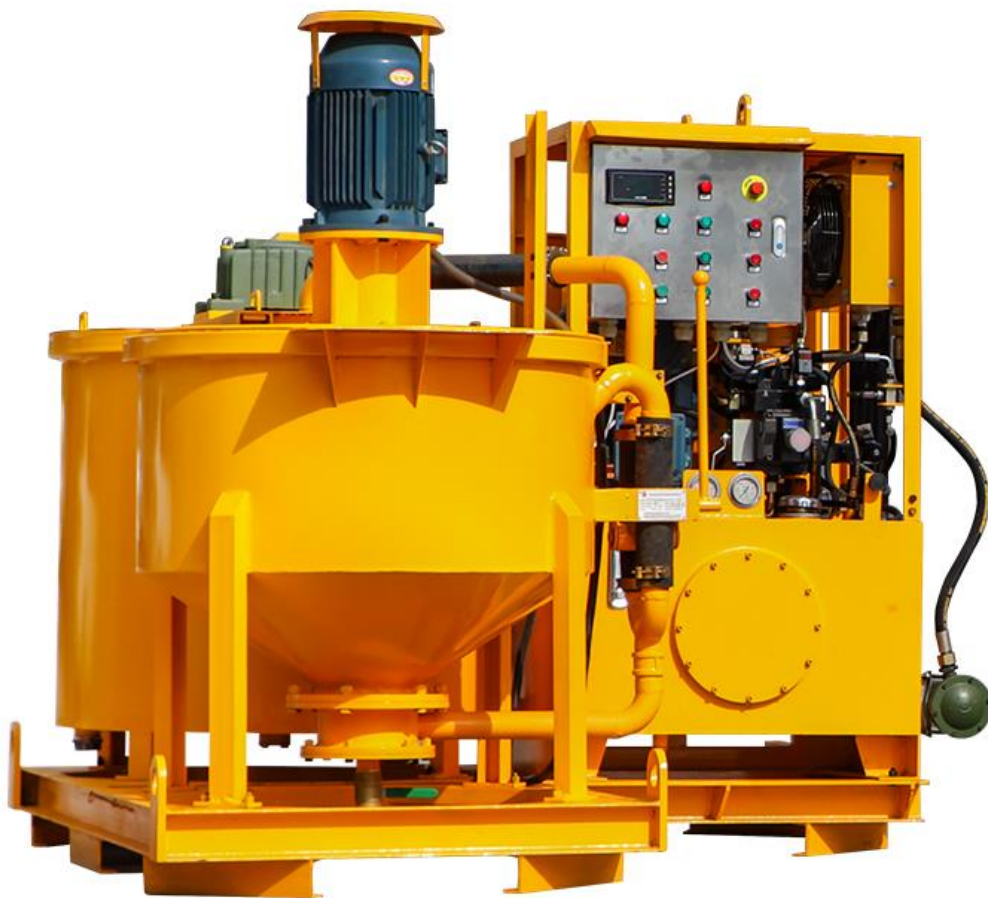

*GGP400/700/80DPL-E Grout/Inject Station*

---



## Gaode Equipment Co., Ltd.

Add: No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District,  
Zhengzhou, Henan China

P.C.: 450000

Tel: +86-371-55951660 Fax: +86-371-63526676

Email: [info@gaodetec.com](mailto:info@gaodetec.com)

Web: [www.gaodetec.com](http://www.gaodetec.com)