

GMP40/10-H Plaster Pump


Specification: this pump is designed as the combination of GH38-430 hose pump (peristaltic type), mini air compressor and frequency converter.

GH38-430 HEAVY-DUTY HOSE PUMP TECHNICAL DATA

Item	Description	Remarks
Rotor Dia.(D)	430mm	
Hose ID	38mm/1.5inch	
Rotor Rev.	15-33rpm	
Rated Output/Flow	18-40L/min	
Rated pressure	10 bar	
Motor Power	3 KW /4hp, 3 phase, 380v, 50 Hz,IP55	*
Suck lift	5 meter	
Hose material	NR(Natural Rubber)	
Overall Dimension	1600x800x1060mm	
Weight	440kg	

Note:1,the gearbox is heavy -duty Helical-bevel gear
2,*WEG or China domestic electric motor

GH38-430:

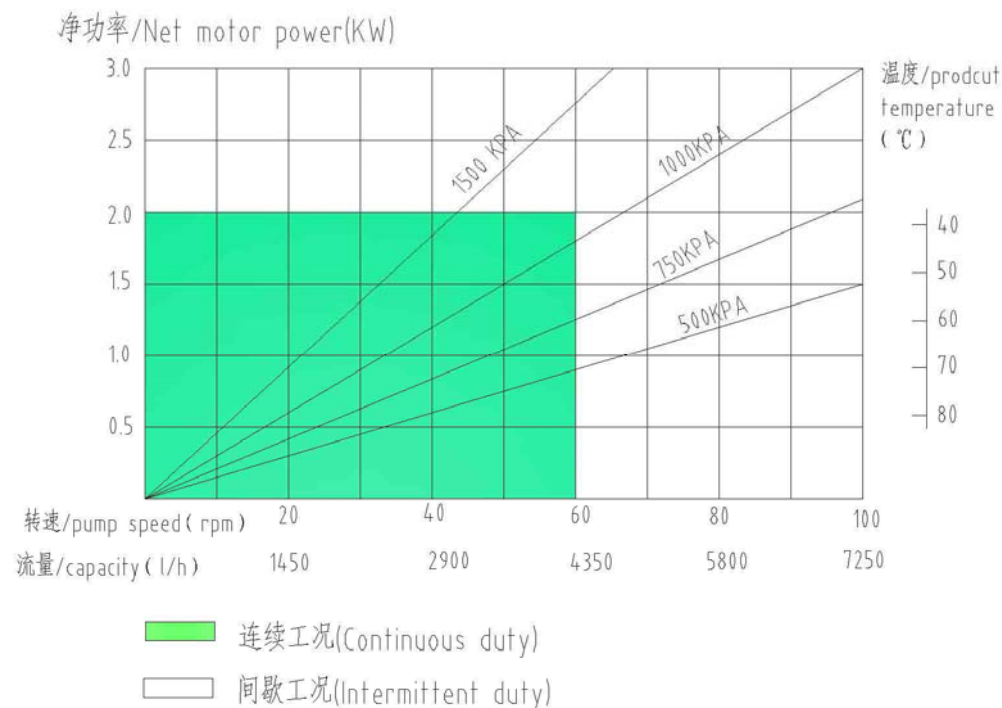

Plaster Pump

1. Rigid tooth flank helical gear
2. Nozzle specially design to get continuous spaying flow
3. Mini air compressor

Mini Air Compressor	
Rated output	300L/min
Rated pressure	7 bar



Frequency Converter
The basic version is one made in China, if you need Siemens, SEW or ABB, please check it from us.



Gearbox
Rigid tooth flank helical gear



Nozzle
Specially design to get continuous spaying flow



A complete set of GMP40/10-H plaster pump

No.	Description	Qty.	Unit	Remarks
1	GMP40/10-H main unit	1	set	
2	Pump squeeze tube	1	pcs	
3	Conveying hose, ID38, length 10 meter	2	pcs	
4	Nozzle Assy.	1	set	
5	Nozzle Tip	1	pcs	
6	Accessories	1	set	

Certificate:
CE AND ISO9001-2008



Pictures:



Clamp:



Rubber gasket:




Clean Ball:





New Version:

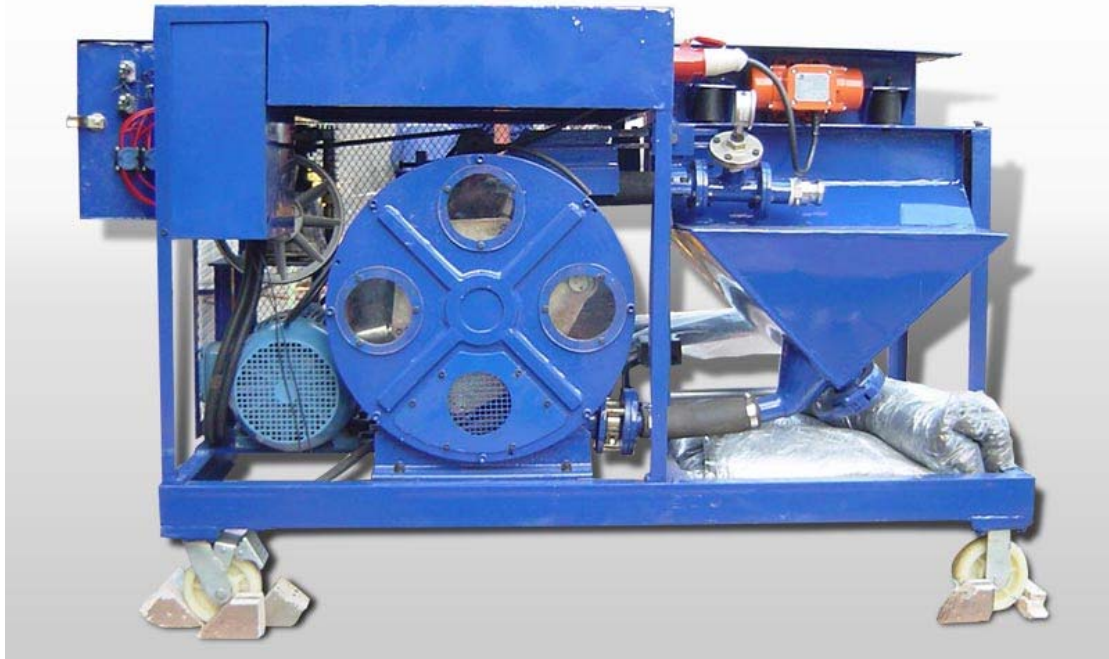

Gaode Equipment Co., Ltd.

Add: No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District, Zhengzhou, Henan China

P.C.: 450000

Tel: +86-371-55951210

Fax: +86-371-63526676

Email: info@gaodetec.com

Web: www.gaodetec.com