


## GHS0117 Hydroseeder

GHS0117 is one hydroseeding machine for small to mid-size hydroseeding projects on residential and commercial projects, sports fields, apartment and office buildings, golf courses, parks and more other efficient, cost effective and profitable applications.

- 17kw Briggs & Stratton gasoline engine, air cooled;
- Specially design centrifugal pump: 3"x1.5", capacity 15m<sup>3</sup>/h;
- Spraying distance of up to 26m from cannon;
- With hydraulic hose reel;
- Agitator with helical paddle orientation and liquid recirculation.

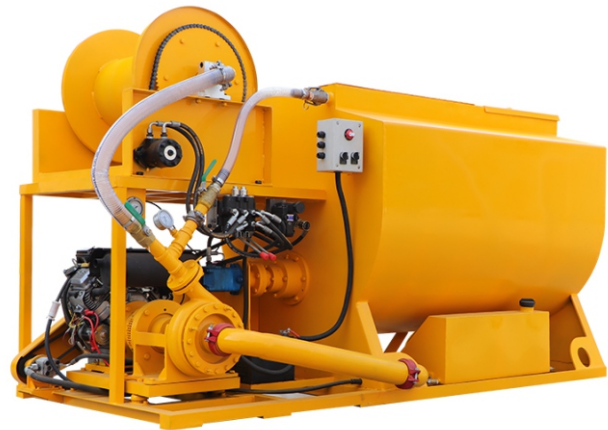

<b>Model</b>	<b>GHS0117</b>	
Power	17kw Briggs & Stratton gasoline engine, air cooled	
Tank Size	Liquid capacity: 1200L(317Gallon) Working capacity: 1000L(264Gallon)	
Pump	Centrifugal pump:3"x1.5" (7.5X3.75cm), 15m <sup>3</sup> /h@5bar, 19mm solid clearance	
Agitation	Mechanical agitator with helical paddle orientation and liquid recirculation	
Rotating speed of mixer shaft	0-110rpm	
Maximum horizontal conveying distance	26m	
Spraying guns type	Hose gun	
Dimensions	2600x1340x1515mm	
Weight	1320kg	
Options	Stainless steel material for whole unit Remote control unit	Hose Reel with hose Trailer

Model	Power	Tank Size	Centrifugal pump	Agitation	Maximum horizontal conveying distance	Dimensions	Weight
GHS15190	190KW, Cummins engine, water-cooled	Liquid capacity: 15000L Working capacity: 13500L	6"x3" (15.2X7.6cm), 120m <sup>3</sup> /h@14bar, 32mm solid clearance	Twin mechanical agitators with helical paddle orientation and liquid recirculation Rotating speed: 0-130rpm	85m	7200x2500x2915mm	8500kg
		Liquid capacity: 13000L Working capacity: 11700L					
GHS13190					85m	7200x2500x2915mm	8000kg
GHS10120	120KW, Cummins engine, water-cooled	Liquid capacity: 10000L Working capacity: 8950L	5"x2.5" (12.7X6.4cm), 90m <sup>3</sup> /h@11bar, 25mm solid clearance	Twin mechanical agitators with helical paddle orientation and liquid recirculation Rotating speed: 0-110rpm	70m	6750x2200x2510mm	5500kg
GHS08100A/ GHS06100A	103KW, Yuchai engine, water-cooled	Liquid capacity: 8000L/6000L Working capacity: 7300L/5500L	5"x2-1/2" (12.7X6.4cm), 100m <sup>3</sup> /h@11bar, 25mm solid clearance	Mechanical agitator with helical paddle orientation and liquid recirculation Rotating speed: 0-130rpm	70m	5875x2150x2750mm	4850kg
GHS08100/ GHS06100	100KW, Cummins engine, water-cooled	Liquid capacity: 8000L/6000L Working capacity: 7300L/5500L	5"x2.5" (12.6X7.6cm), 100m <sup>3</sup> /h@11bar, 20mm solid clearance		70m	5800x2100x2750mm	5000kg
GHS0883/ GHS0683	83KW, China Huafeng engine, water-cooled	Liquid capacity: 8000L/6000L Working capacity: 7300L/5500L	5"x2.5" (12.6X6.3cm), 90m <sup>3</sup> /h@10bar, 20mm solid clearance		60m	4800x2200x2550mm	3350kg
GHS0551	51KW, Cummins engine, water-cooled	Liquid capacity: 5000L Working capacity: 3830L	4"x2" (10.2X5cm), 73m <sup>3</sup> /h@7bar, 25mm solid clearance	Mechanical agitator with helical paddle orientation and liquid recirculation Rotating speed: 0-110rpm	60m	3350x2030x2600mm	2950kg
GHS0353	53KW, Yuchai engine, water-cooled	Liquid capacity: 3000L Working capacity: 2550L	4"x2" (10X5cm), 70m <sup>3</sup> /h@7bar, 10mm solid clearance				
GHS0217	17KW, Briggs & Stratton gasoline engine, air cooled	Liquid capacity: 2000L Working capacity: 1700L	3"x1.5" (7.5X3.75cm), 15m <sup>3</sup> /h@5bar, 19mm solid clearance		35m	3500x1750x2420mm	1600kg
GHS0117	17KW, Briggs & Stratton gasoline engine, air cooled	Liquid capacity: 1200L Working capacity: 1000L	3"x1.5" (7.5X3.75cm), 15m <sup>3</sup> /h@5bar, 19mm solid clearance		26m	2600x1340x1515mm	1320kg

**Options:** Stainless steel material for whole unit, Hose Reel with hose, Remote control unit, Trailer etc.



## Gaode Equipment Co., Ltd.

Add: No.9, Building 14, Yard No. 4, Fengqing Road, Jinshui District,  
Zhengzhou, Henan China

P. C. : 450053

Tel: +86-371-55951660

Mobile/WhatsApp/Viber: +86-13939067523

Email: info@gaodetec.com

Website: www.gaodetec.com

